


**CALIDAD Y CONFORT COMPROBADO**



**HIGH WALL  
MINI-SPLIT SYSTEM**

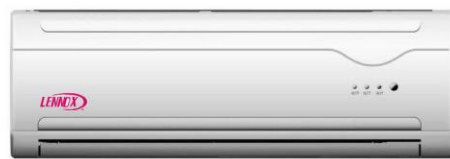

**LENNOX**

*Innovation never felt so good.™*





## FEATURES:

**Quiet Evaporator operation-** due to large Diameter Cross Flow Fan, which greatly reduces air noise.

**Improved temperature and humidity control-** by using Hydrophilic Aluminum Fin.

**Extremely quiet Condenser-** is attained by using Bird Tail Propeller Fan.

**Durable Condenser Cabinet-** coated with Electrolytic Zinc and Anti-Rust paint including internal components.

**Auto Restart-** When Power supply is interrupted and then restored the unit automatically resets to the previous function

**High efficiencies-** is attained due to its Trapeziform inner groove Copper tubing.

**Increased Heat Transfer capability-** by using a 4 -bend Heat Exchanger which has a surface greater by up to 32% from standard units.

**Sleep mode-** Unit will decrease temperature 1degree per hour for the first two hours then hold for next 5 hours at which it will return to original Temp.

Indoor Model		KF25-09C-GW-E	KF5-12C-GW-E	KF51-18C-GW-E	KF70-24C-GW-E	KF88C-30GN-E
Outdoor Model		KF25-09-GW-C	KF35-12C-GW-C	KF51-18C-GW-C	KF70-24-GW-C	KF88-30AQT-C
Cooling Capacity Nominal	BTUH	9000	12000	18000	24000	30000
Operating Current		4.3	5.2	8.6	11.9	17.2
EER		9.6	10	9.5	9.6	8.5
Power Supply		220v/60Hz/1PH				
Power Input	Watts	940	1180	1890	2490	3590

### Indoor Unit:

Fan Speed H/M/L	RPM	1300/1100/950	1300/1100/950	1220/1100/1000	1220/1100/1000	1220/1100/1000
Air Flow		450	500	650/800	1100	1250
Noise Level	m2/h	dB (A)	29-42	35-42	41-50	46-50
Coil Type		Inner Grooved Copper Tube				
Power Input	Watt	40	40	60	100	100
Unit Dimensions WDH	mm	745 x 250 x 195	745 x 250 x 195	900 x 292 x 215	1000 x 320 x 200	1225 x 330 x 245
Net/Gross Weight	Lbs	22/29	22/29	40/48	44/53	44/53

### Outdoor Unit:

Compressor Type		Rotary				
Operating Current	AMP	4.1	5.0	8.3	11.3	16.7
Noise Level	dB (A)	55	58	60	60	60
Coil Type		Inner Grooved Copper Tube				
Power Input	W	900	1140	1830	2390	3490
Unit Dimensions WDH	mm	700x225x500	795x255x510	795x255x540	870x310x700	900x330x835
Net/Gross Weight	Lbs	77/84	77/84	110/154	110/154	110/154

### Refrigerant Piping

Refrigerant R-22	grams	560	650	1040	1180	2000
Connection Type		Flare/Nut				
Liquid Line	in	1/4	1/4	3/8	3/8	3/8
Suction Line	in	3/8	1/2	5/8	5/8	5/8
Max. Ref. Pipe Length	ft	33	33	50	50	50
Max Ref. Vertical Lgth	ft	16,4	16,4	16,4	16,4	16,4
Application Area	m2	16	22	32	38	42

**LENNOX**

Innovation never felt so good.™

Visitenos en [www.refritodo.com](http://www.refritodo.com)

o comuníquese con nosotros al

Telfs: 58-241 - 872.00.27 / 872.10.20 / 872.39.16

Fax: 58-241 - 871.30.62 E-mail: [refritodo@cantv.net](mailto:refritodo@cantv.net)

